


494

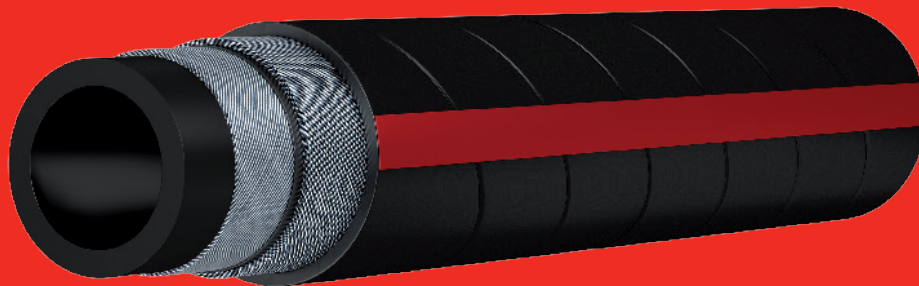

## Ref 494 - Hydrocarbons delivery hose 30 bar Fire resistant

Intended for discharge of hydrocarbons.

For others fluids elastomers compound can be modified.

Anti-corrosion steel reinforcement.

Neoprene outer cover ensures excellent resistance to ozone, oils and abrasion.

Flame resistant according to MSHA standard and fire resistant according to ISO15540 standard (Tests carried out at the 13 bar operating pressure).

### Technical specifications:

Inner tube : black NBR rubber

Reinforcement : 2 or 4 metal spirals

Outer cover : CR self-extinguishing

Outer finish : fine tape-wrapped

Temperature : -40 °C to +80 °C

Production lengths : 60 metres

Colour : black with red lay line

Part n°	Inner diameter		Outer diameter	Wall thickness	Working pressure	Burst pressure	Bend radius	Weight
	mm	Inch						
494 50	50,8	2"	66	8	30	160	225	2,5
494 75	76,2	3"	94	9	30	160	380	4,5
494 100	101,6	4"	122	10	30	160	510	6,7
494 125	127	5"	149	11	30	120	720	8,0
494 150	152,4	6"	174	11	30	120	800	10,75

Other size on request